

Linear Height LH-600E Promo **10% Off**

Effective February 1 through April 30, 2018



Mitutoyo

Linear Height LH-600E Promo

10% Off

Effective February 1 through April 30, 2018

Promo Price
\$7,632

Order No. 518-351A-21
standard



Promo Price
\$8,091

Order No. 518-352A-21
with power grip



Linear Height LH-600E

The Mitutoyo Linear Height LH-600E offers advanced performance for reliable and easy 2D measurement.

Measuring Range (stroke) 0–38" (24") / 0–972mm (600mm)

FEATURES


- True 2-D measurement
- High Accuracy: $(1.1+0.6L/600)\mu\text{m}$ (L=Length of mm)
- Measuring Range (Stroke): 0-38" (24"), 0-972mm (600mm)
- Selectable Resolution: .000001"/.00001"/.0001"/.001"/.0001mm/0.001mm/.01mm/0.1mm
- Basic statistical functions are provided
- RS-232C data output provides the option of evaluating measurement data externally with SPC software on a PC
- USB Data Storage
- One-key operation for running semiautomatic measurement
- Data entry from a Digimatic tool
- Highest functionality: 21 parameters
- Pneumatic full/semi floating system
- Holds 60,000 data points
- Bright, back-lit LCD



518-351A-21

Mitutoyo



Linear Height LH-600E

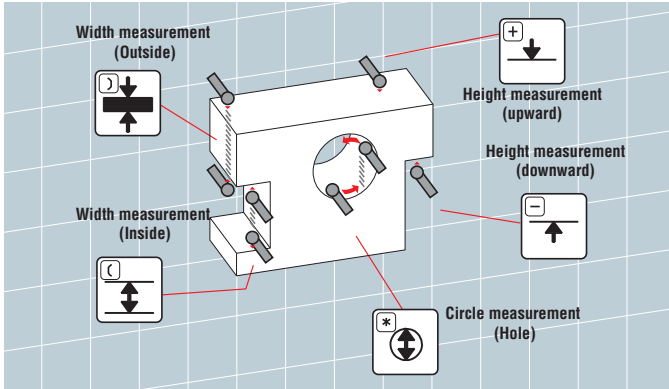

Frequently used measurements



Numerous optional probes enable many types of measurement

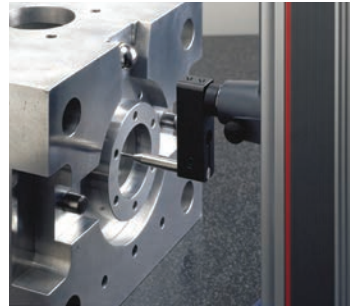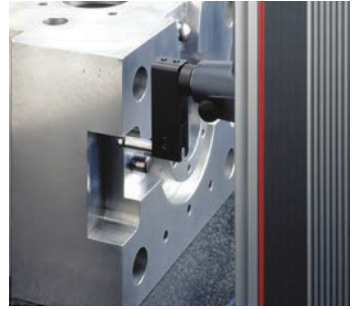

View Video

Distributed By:

Mitutoyo

Mitutoyo America Corporation

www.mitutoyo.com

One Number to Serve You Better

1-888-MITUTOYO (1-888-648-8869)

M³ Solution Centers:

Aurora, Illinois (Headquarters)

Boston, Massachusetts

Charlotte, North Carolina

Cincinnati, Ohio

Detroit, Michigan

Los Angeles, California

Birmingham, Alabama

Seattle, Washington

Houston, Texas

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

We reserve the right to change specifications and prices without notice.