

Fowler



LIFETIME WARRANTY



*NO Gimmicks
NO Hurdles
NO Nonsense*



NEW!
Integrated
Bluetooth!



We are proud to announce another industry first for Fowler. In our 67th year as a family-owned, independent USA metrology company, Fowler continues to lead the way.

We are so confident that these Fowler/Sylvac products are the most accurate, most dependable, best made products you can buy, we are extending the warranty to last a lifetime!

Quality, accuracy, dependability, world-class customer service and now a real Lifetime Warranty!



Contact us today for a demo!

1-800-788-2353 ext. 324
www.fvfowler.com
sales@fvfowler.com

Mark VI Electronic Indicators

Features:

- Robust construction
- Water and coolant resistant
- Protection class IP-67
- Repeatability: 2µm
- Output: Proximity/Power - USB/RS232/digimatic/Wireless
- Battery life: 10,000 hours of operation
- Menus customizable with free software
- Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset, Auto Off, etc)
- Aluminum housing
- Bezel rotates 270°
- Large display with LED tolerance indicators
- Includes lug back

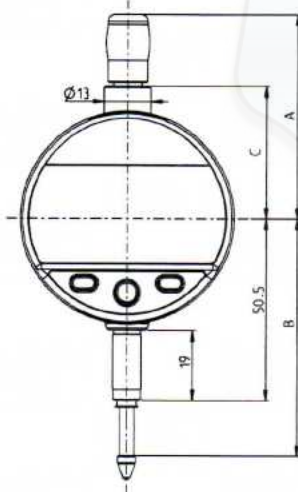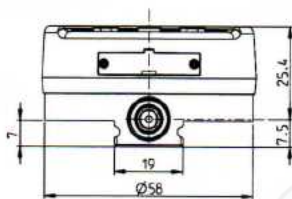

This Button is programmable for common functions

LIFETIME WARRANTY

IP67




Swiss Quality!

Fowler POWER INTERFACE



Fowler PROXIMITY INTERFACE

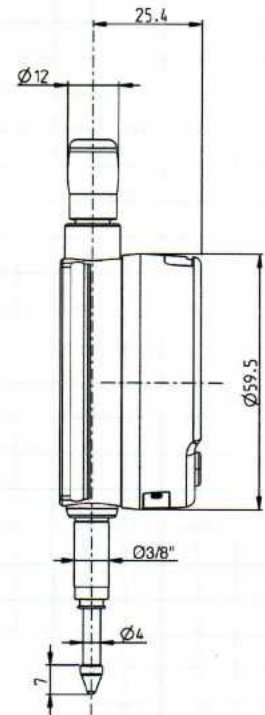

Part Number	Range	Maximum Error	Resolution
54-530-125	0-.500"/12.5mm	0.0004"/.01mm	.0005"/.01mm
54-530-135	0-.500"/12.5mm	0.00012"/.003mm	.00005"/.001mm
54-530-145	0-1"/25mm	0.0004"/.01mm	.0005"/.01mm
54-530-155	0-1"/25mm	0.00016"/.004mm	.00005"/.001mm
54-530-175	0-2"/50mm	0.00019"/.005mm	.00005"/.001mm
54-530-195	0-4"/100mm	0.00024"/.006mm	.00005"/.001mm
54-530-215	0-6"/150mm	0.0004"/.01mm	.00005"/.001mm
8mm Stem Models:			
54-530-136	0-.500"/12.5mm	0.00012"/.003mm	.00005"/.001mm
54-530-156	0-1"/25mm	0.00016"/.004mm	.00005"/.001mm
IP67 Models with Rubber Boot:			
54-530-137	0-.500"/12.5mm	0.00012"/.003mm	.00005"/.001mm
54-530-157	0-1"/25mm	0.00016"/.004mm	.00005"/.001mm
Mark VI Accessories:			
54-530-211	Standard Lug Back		
54-530-212	90° Lug Back		
54-115-526	Proximity USB Cable		
54-115-528	Power USB Cable		



Swiss Quality!

Integrated Bluetooth Technology offers output without the hassle of cables or antennas hanging from the indicator. Your USB port is all you need.



The analog display allows you to quickly view reversal points



Mark VI Electronic Indicators With Integrated Bluetooth Technology

Features:

- Robust construction
- Water and coolant resistant
- Protection class IP-67
- Repeatability: 2µm
- Battery life: 10,000 hours of operation
- Menus customizable with free software.
- Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset, Auto Off, etc)
- Aluminum housing
- Bezel rotates 270°
- Large display with LED tolerance indicators
- Includes lug back



LIFETIME WARRANTY

Part Number	Range	Maximum Error	Resolution
54-530-335	0- .500"/12.5mm	0.00012"/.003mm	.00005"/.001mm
54-530-355	0-1.000"/25mm	0.00016"/.004mm	.00005"/.001mm

Mark VI Electronic Indicators With Analog Display

Features:

- Robust construction
- Water and coolant resistant
- Protection class IP-67
- Repeatability: 2µm
- Output: Proximity/Power - USB/RS232/digimatic/Wireless
- Battery life: 10,000 hours of operation
- Menus customizable with free software
- Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset, Auto Off, etc)
- Aluminum housing
- Bezel rotates 270°
- Large display with LED tolerance indicators
- Includes lug back



LIFETIME WARRANTY

Part Number	Range	Maximum Error	Resolution
54-530-535	0- .500"/12.5mm	0.00012"/.003mm	.00005"/.001mm
54-530-555	0-1.000"/25mm	0.00016"/.004mm	.00005"/.001mm

Lifetime Warranty

FLEXIBLE DATA

Easily Connect any Lifetime Warranty Product to a
computer running Fowler-Sylvac Sylconnect

30 Gage Capacity



Fowler-Sylvac
D300S
Digital Display
P/N: 54-618-300



MEASUREMENT ENGINEERING
Measure Smarter



Fowler-Sylvac
Sylconnect Software
P/N: 54-777-000
(computer not included)



Output to:
USB Flashdrive
Ethernet
RS232

A COLLECTION

to a Fowler-Sylvac D300S Digital Display or a Software for a robust data collection solution!

Plug-and-Play Ease



LIFETIME WARRANTY



ware
5
ided)



LIFETIME WARRANTY



LIFETIME WARRANTY




Ultra-Cal V Electronic Caliper



Features:

- Maximum Error: .001"/.02mm
- 4-way measurement, inside, outside, depth and step (6" & 8" models)
- Resolution: .0005"/.01mm
- Repeatability: .0005"/.01mm
- Direct inch/metric conversion
- Temperature range 5 to 40C° working; -20 to 60C° in storage.
- Hardened stainless steel construction.
- Direct RS-232 output
- Features Absolute/Relative Measuring Modes
- Hold function
- Thumbroll (6" model only)
- Includes case

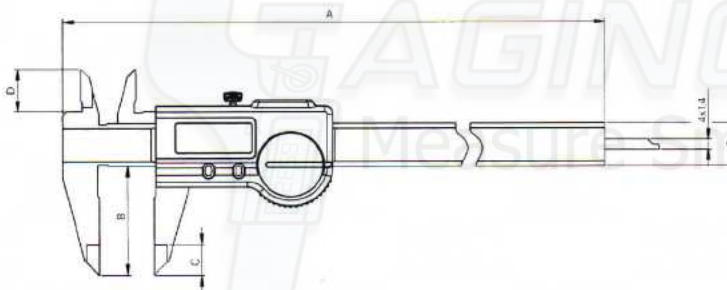

Technical Specifications:

	54-100-067-1	54-100-068-1	54-100-069-1
Measuring range	6"/150mm	8"/200mm	12"/300mm
Accuracy	0.0008"/20µm	0.0012"/30µm	0.0012"/30µm
Resolution	0.0005"/.01mm	0.0005"/.01mm	0.0005"/.01mm
A (mm)	233	290	387
B (mm)	40	50	64
C (mm)	11	14	14
D (mm)	16	19	19
E (mm)	16 x 3.5	16 x 3.5	16 x 4
Depth rod (mm)	4 x 1.4	4 x 1.4	N/A
Protection Rating IEC 60529	IP67	IP67	IP67
Zero Setting	✓	✓	✓
REL and ABS functions	✓	✓	✓

Part Number	Range	Accuracy	Resolution
54-100-067-1	6"/150mm	0.0008"/20µm	0.0005"/.01mm
54-100-068-1	8"/200mm	0.0012"/30µm	0.0005"/.01mm
54-100-069-1	12"/300mm	0.0012"/30µm	0.0005"/.01mm
Accessories			
54-115-527	Proximity RS-232 Cable		
54-115-526	Proximity USB Cable		
54-100-350	Replacement Battery		

LIFETIME WARRANTY

*Top-of-the-line Caliper!
Fowler's best caliper!*

IP67

**Fowler
PROXIMITY
INTERFACE**



Lifetime Warranty

LIFETIME WARRANTY 



Swiss Quality!

IP67


Rapid spindle Movement
Extended range

Fowler

Rapid-Mic Electronic Micrometer



- Auto On/Off
- Position recall
- IP67 with or without data cable
- Delrin quick displacement thimble
- Adjustable measuring force, 5N/10N
- Non-rotating spindle
- USB output
- Carbide anvils
- Extended Range 0-30mm, 30-66mm and 66-102mm
- Blade anvils available, contact Fowler Technical Department

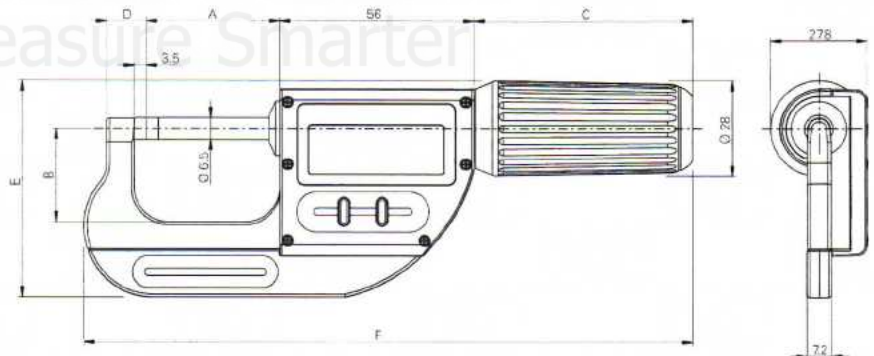

****Speciality Micrometers available,
Contact the Fowler Technical Department.***

Part Number	Range	Max Error
54-815-030	0-1.18"/0-30mm	.00012"/.003mm
54-815-060	1.18"-2.6"/30-66mm	.00016"/.004mm
54-815-100	2.6"-4.0"/66-102mm	.00020"/.005mm
Set		
54-815-111	0-4.0"/0-102mm Rapid Mic Set	
Accessories		
54-815-222	Stand	

Specifications subject to change without notice.

Lifetime Warranty